

PRO-X

P30



DESCRIPTION


The PRO-X series has been designed for particular professional applications. Model P30 is ideal for chemical and pharmaceutical laboratories, where operators are obliged to work in close contact with toxic substances. The anodised aluminium filtering unit encloses a fabric prefilter and a high efficiency electrostatic cell that can be height adjusted and inclined. The stainless steel base can also be used as a support surface.

TECHNICAL SPECIFICATIONS

MODEL	u.m.	P30
Capacity	m³/h	300
Noise	dB	42
Consumption	W	95
Power input	V-Hz	230 - 50/60
Dimensions AxBxC	mm	600x450x680
Weight	Kg	8
Cells	n°	1
Installation		floor-mounted
Remote control		no
Efficiency Filtration	on PM2.5	95% inconstant

PRO-X SERIES

P30

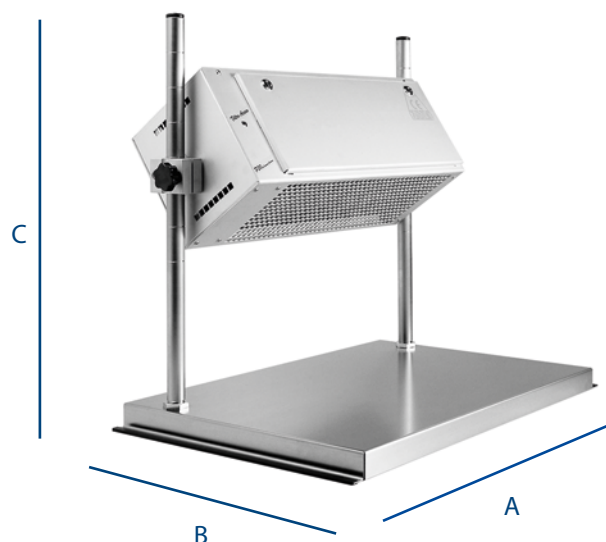

BASIC SYSTEM

BASIC SYSTEM technology identifies traditional air purification systems with electrostatic filters. This technology is used by all the manufacturers in the sector. Unlike other technologies, its efficiency is not constant as the dirtier the filter gets, the more air filtering performance level lowers, though this takes place gradually. This technology is the simplest and earliest version of electrostatic filtration and works with standard applications and management systems. The information managed by the electronic circuit and displayed on the control panel only shows the basic functions.

**BASIC
SYSTEM**

CERTIFICATIONS

ILH BERLIN
INSTITUT FÜR LUFTHYGIENE

BSRIA



CETIAT
ensemble, innover et valider



Standard UNI 11254

